

Cliquer ici pour la version française


# USB RS232




FTDICHIP's FT232RL component allows a USB connection to a very fast R232 link

A virtual serial link or a programming using the DDL library allows the interfacing under Windows, Mac or Linux

Max Power Output +5V / 75mA (other on request)

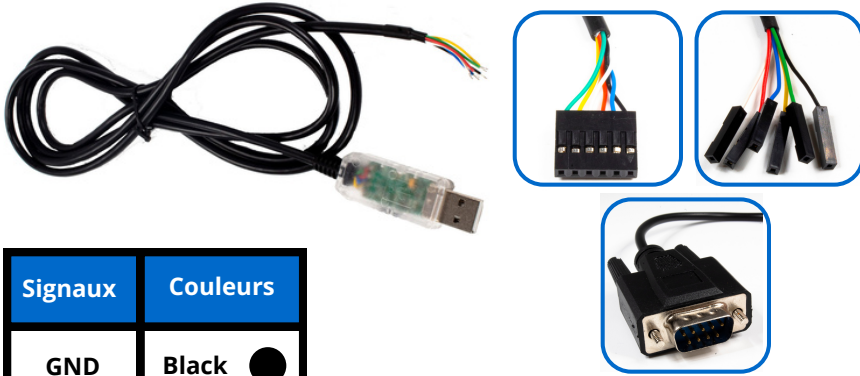

Signaux	Couleurs
GND	Black ●
CTS	Blue (Brown) ●
VCC	Red ●
TXD	White (Orange) ○
RXD	Yellow ●
RTS	Green ●

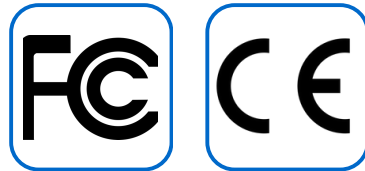

## For more possibilities

Do you have a special request?  
Drivers and custom requests on :  
[info.ebconnections.com](http://info.ebconnections.com)

Or contact us :  
Phone : 03.86.32.59.50  
Email : [eric.belouet@ebconnections.com](mailto:eric.belouet@ebconnections.com)

## Informations

- Data rates : 1MBaud
- USB 2.0 speed : 12Mbps
- USB managed by the cable electronics
- USB connector : Type A
- Max length connection : 15m (49ft)
- Operating temperature : -40°C à +85°C
- Interface : UART
- EEPROM configurable

Référence	Caractéristiques
USBR232-F1.8M	Wire ended - length 1.8m (6.5ft) (Standard)
USBR232-DB9_0.1M	DB9 connector - length 10cm (4")
USBR232-DB9_1.8M	DB9 connector - length 1.8m (6.5ft)
USBR232-DB9_5M	DB9 connector - length 5m (200ft)

Request a customization or see the drivers on [info.ebconnections.com](http://info.ebconnections.com)

